

# Polymer Labyrinth Seal


## Unitized, Non-Contacting Seal for Bearing Protection

The Chesterton® patent-pending Polymer Labyrinth Seal (PLS) is a non-contact bearing seal designed to provide protection for pumps, gearboxes, and other rotating equipment in splash applications. The unique design eliminates fretting caused by conventional lip seals and helps to increase bearing and gearbox life by extending the mean time between equipment repairs.

This unitized labyrinth seal uses Chesterton’s exclusive polymer to create a non-contacting 3-piece seal design that includes a rotor, a stator, and a built-in valve with no wearing parts. While in operation, centrifugal force and gravity ensure lubricant is contained within the labyrinth and flows back into the bearing housing while outside contaminants are excluded and redirected back to atmosphere.

The unique design also incorporates a built-in valve that is activated by shaft rotation which engages during shutdown periods to create a positive seal during idle time, blocking ingress of external contaminants from entering the housing.

Chesterton’s material technology is manufactured from an advanced, durable, maintenance-friendly thermoset polymer compatible with common bearing and gear oils that offers a cost-effective alternative solution to other material options. Each seal is custom manufactured to the exact equipment size needed to maximize performance.

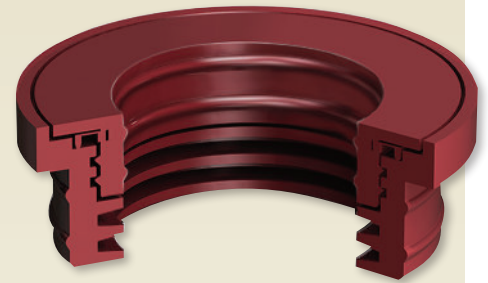


- High-performance, non-contact design, eliminates fretting caused by lip seals
- Keeps lubrication in and seals out external contamination
- Unitized design and durable non-sparking material provide easy, reliable installation
- Available in a variety of configurations to meet plant-wide equipment needs
- Same day shipment availability, minimizing downtime and associated costs
- Standard sizes available for popular equipment, custom sizes available upon request
- IP56 (third party certification) designed to be resistant to dust and water

### SPECIFICATIONS

Material (designation)	Size Range mm (inch)	Temperature °C (°F)	Speed* m/s (ft/min)	Eccentricity mm (inch)
Polymer Labyrinth Seal (EU) AWC800	25 to 500.8 (1 to 20)	-40 to 93 (-40 to 200)	30.5 (6000)	0.75 (0.030)

\*Contact engineering for speed beyond these limits



### PRODUCT PROFILES




PLS1



PLS2



PLS3

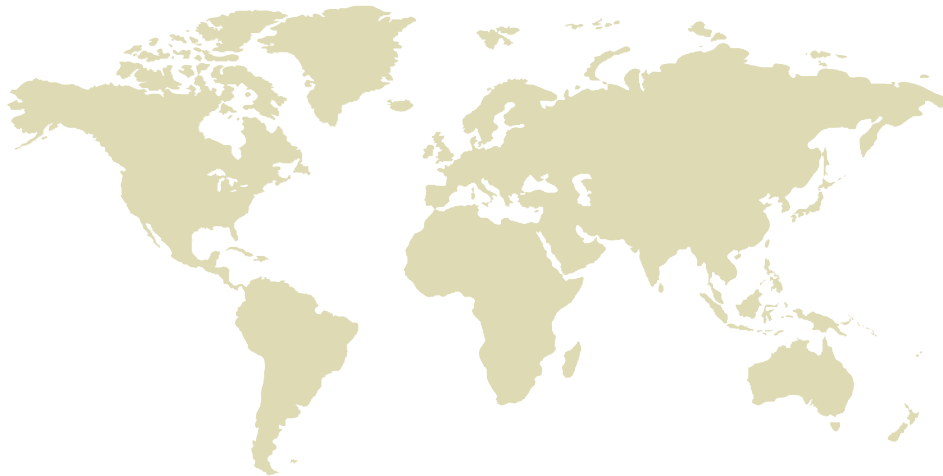

## GLOBAL SOLUTIONS, LOCAL SERVICE

Since its founding in 1884, A.W. Chesterton Company has successfully met the critical needs of its diverse customer base. Today, as always, customers count on Chesterton solutions to increase equipment reliability, optimize energy consumption, and provide local technical support and service wherever they are in the world.

Chesterton's global capabilities include:

- Servicing plants in over 100 countries
- Global manufacturing operations
- More than 500 Service Centers and Sales Offices worldwide
- Over 1200 trained local Service Specialists and Technicians

Visit our website at  
[www.chesterton.com](http://www.chesterton.com)

---

Chesterton ISO certificates available on  
[www.chesterton.com/corporate/iso](http://www.chesterton.com/corporate/iso)

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only. A.W. Chesterton Company disclaims all warranties express or implied, including warranties of merchantability and fitness for a particular purpose. Liability, if any, is limited to product replacement only. Any images contained herein are for general illustrative or aesthetic purposes only and are not intended to convey any instructional, safety, handling or usage information or advice respecting any product or equipment. Please refer to relevant Safety Data Sheets, Product Data Sheets, and/or Product Labels for safe use, storage, handling, and disposal of products, or consult with your local Chesterton sales representative.

© 2017 A.W. Chesterton Company.  
® Registered trademark owned by A.W. Chesterton Company  
in USA and other countries, unless otherwise noted.

Distributed by: